

## 

Name Behind Quality

2-Pack Epoxy Filler/Putty/Fairing Compound


A high performance solvent free two-pack epoxy compound for filling, repair and fairing works, it provides excellent soft anti slump properties, offers easy application and sanding properties. It has high compressive strengths, cured with negligible shrinkage and is resistance to chemical and physical attack.

## USES

- Suitable for woods, fiberglass, composite materials, concrete and properly prepared carbon steel and aluminium surface.
- Suitable to use for repair all surface cracks, holes, gaps filling.
- Suitable for Boat fairing and surface repair works.
- Suitable for above water and underwater immersion when fully cured.





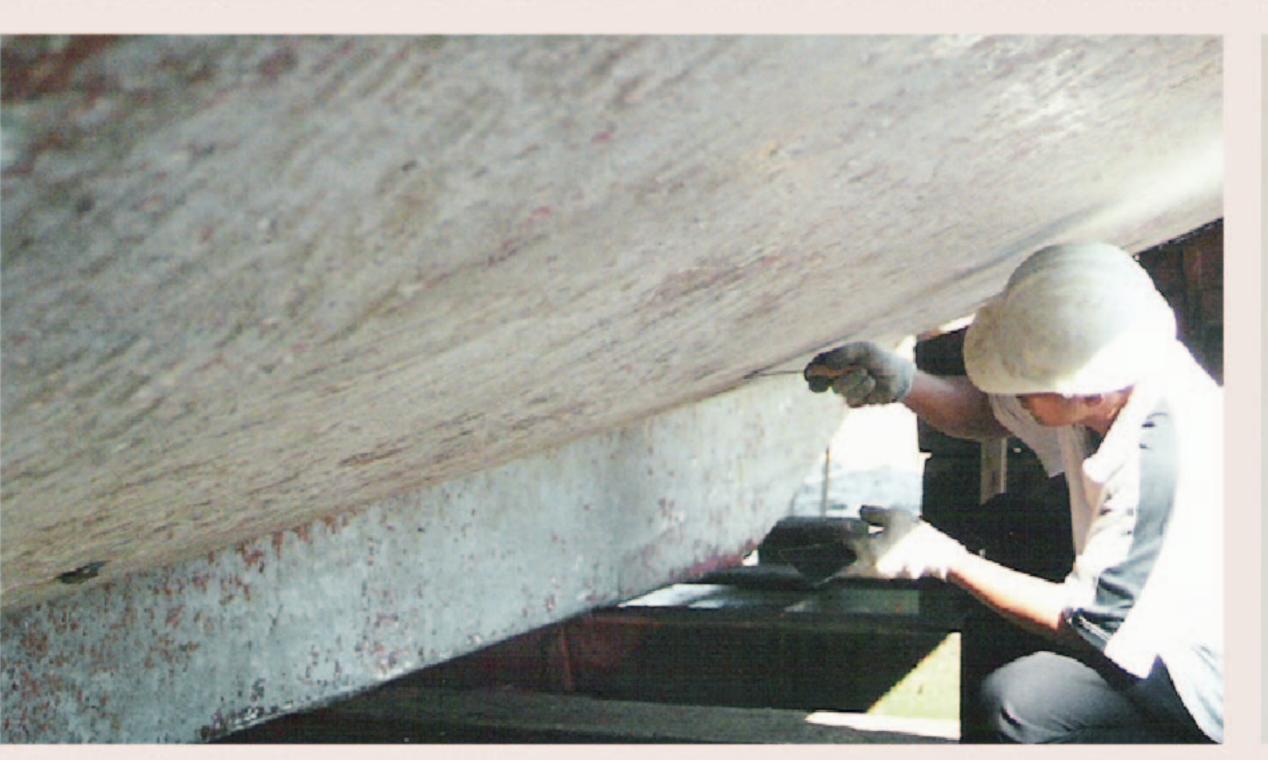






Easy to apply



Easy to sand



Excellent adhesion to various substrates



Suitable for above/below water line







INDUSTRIAL























## UNIFILLER

2-Pack Epoxy Filler/Putty/Fairing Compound

## **Available packing sizes:**


0.8L-set (1.37kg) 1.8L-set (3.10kg)

5.5L-set (9.45kg)





Mixed Part A and Part B according to the ratio (1:1 by volume) than mixed thoroughly until colour is uniform and homogenous mixture.



It is recommended to fill the gaps properly by squeeze the filler into the gap till it is full and remove excessive filler by scraper.



This product is designed for application by spatula, putty knife or trowel.



Remove the paper tape along the both sides immediately after the gap is filled.



Use paper tape along the both sides of the gaps to obtain good strength filling.



It is recommended to roughen the surface if over coating is required. Clean all equipments immediately after used with Kossan epoxy thinner 6.03.



Buatan Malaysia Oleh:









